


LEE BROOM

ORION GLOBE LIGHT

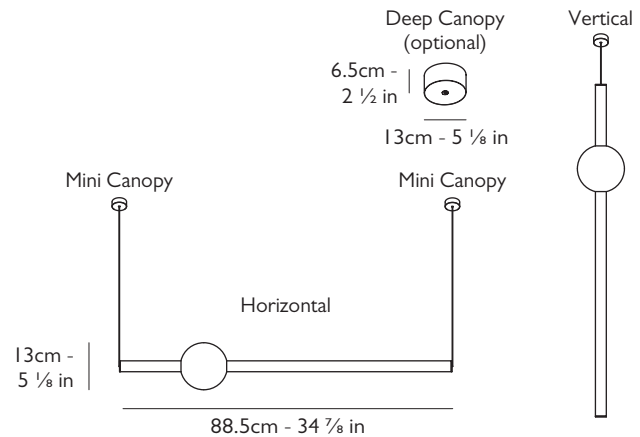

LED Driver Dimensions

10cm x 6cm x 3cm (3 7/8 in x 2 3/8 in x 1 1/8 in)

Suitable sized cavity / housing required for LED driver in ceiling or surface mounting.

Alternatively use deep canopy to mount LED driver in canopy.

PRODUCT DETAILS

Name

Orion Globe Light

Finish & Product Code	110-130v	220-240v
Polished Gold ●	ORI0110	ORI0010
Polished Gunmetal ●	ORI0111	ORI0011

Materials

Opal glass, steel

Illumination 110-130v

6.2w, 2700k, 377 lumen, 24vDC, CRI 85

Supplied with separate LED driver with 110-130v input.

Illumination 220-240v

6.2w, 2700k, 377 lumen, 24vDC, CRI 85

Supplied with separate LED driver with 220-240v input.

Dimming

Dimmable. Recommended dimmers for up to 8 units:

110-130v: Lutron Ariadni C.L AYCL-153P (150w)

220-240v: Varilight V-Pro JPQ401 (120w)

For more than 8 units, please contact us.

Certification

UL, cJUL (110-130v)

CE, CB (220-240v)



Year of Design

2018

Dimensions

H 13cm x W 88.5cm - H 5 1/8 in x W 34 7/8 in

Suspension

Length: 500cm - 196 7/8 in

1 x Adjustable steel tensile wire & 1 x Cord with transparent casing Kit to hang horizontally or vertically included.

Ceiling plate / Canopy

2 x mini canopies to enable LED driver to be surface mounted or installed in ceiling.

H 1.55cm (in ceiling) or H 3.1cm (surface) x Dia 4cm - H 5/8 in (in ceiling) or H 1 1/4cm (surface) x Dia. 1 5/8 in).

Also available is 1 x deep canopy that can mount LED driver in canopy if required (H 6.5cm x Dia 13cm - H 2 1/2 in x Dia 5 1/8 in). Round steel in polished gold finish.

Weight

Product (net): 2.41 kg / 5.31 lbs

Boxed (gross): 3.32 kg / 7.32 lbs

For more information please contact:

US & Canada Inquiries: +1 212 804 8477 - 34 Greene Street, New York, NY 10013 - sales@leebroom.com

UK & Global Inquiries: +44 207 820 0742 - 95 Rivington Street, London, EC2A 3AY - info@leebroom.com

WWW.LEEBROOM.COM

0619rev13

