


LEE BROOM

ORION GLOBE LIGHT (220-240V)

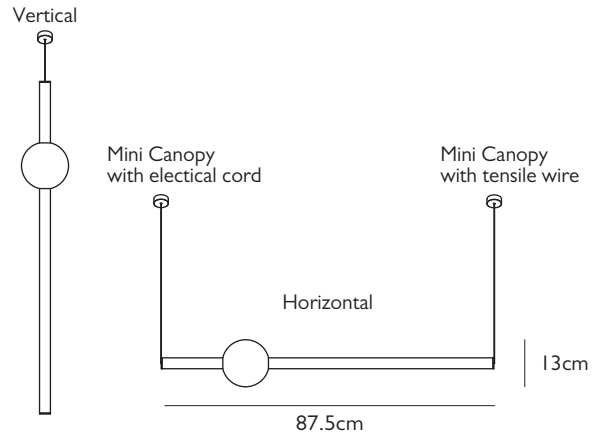

LED Driver Dimensions

10cm x 6cm x 3cm

Suitable sized cavity / housing required for LED driver in ceiling or surface mounting.

Alternatively use deep canopy to mount LED driver in canopy.

PRODUCT DETAILS

Name

Orion Globe Light

Finish & Product Code

Polished Gold	●	ORI0010
Polished Gunmetal	●	ORI0011
Aged Brass	●	ORI0012

Materials

Opal glass globe, steel tube

Illumination

7.6W, 2700k, 377 lumen, 24VDC, CRI >95
Supplied with separate LED driver with 220-240V input.

Dimming

Dimmable. Recommended dimmer for up to 8 units:
Varilight V-Pro JPQ401 (120w)
For more than 8 units, please contact us.

Certification

CE, UKCA, CB



Year of Design

2018

Dimensions

H 13cm x W 87.5cm

Suspension

Length: 500cm (adjustable)

1 x Electrical cord with transparent casing (at end nearest to globe)

1 x Steel tensile wire (at opposite end)

Kit to suspend horizontally or vertically included.

Ceiling plate / Canopy

2 x mini canopies H 1.55cm x Dia 4cm, in matching finish to Orion.

Also available to order separately:

1 x Side Entry Adapter for mini canopy, which enables LED driver to be surface mounted (increases height of mini canopy to 3.1cm).

1 x Deep Canopy that can mount LED driver in canopy if required (H 6.5cm x Dia 13cm).

1 x Ceiling plate cover for junction box to mount mini canopy.


Weight

Product (net): 2.41 kg

Boxed (gross): 3.32 kg

LEE BROOM

ORION GLOBE LIGHT (110-130V)

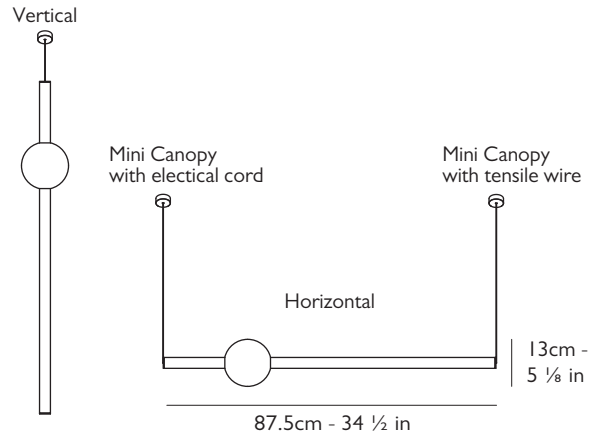

Must be installed with LED driver

LED driver to be installed remotely in suitable sized cavity / housing
Refer to LED driver specification sheet for correct size of LED driver supplied with your particular Orion set-up.

PRODUCT DETAILS

Name

Orion Globe Light

Finish & Product Code

Polished Gold	●	ORI0110
Polished Gunmetal	●	ORI0111
Aged Brass	●	ORI0112

Materials

Opal glass globe, steel tube

Illumination

7.6W, 2700k, 377 lumen, 24VDC, CRI >95
Supplied with separate LED driver with 110-130V input.

Dimming

Dimmable. Lutron C.L dimmers recommended for up to 8 units
For more than 8 units, please contact us.

Certification

UL, cULus



LOW VOLTAGE
LUMINAIRE

Year of Design

2018

Dimensions

H 13cm x W 87.5cm - H 5 1/8 in. x W 34 1/2 in.

Suspension

Length: 500cm - 196 7/8 in. (adjustable)

1 x Electrical cord with transparent casing (at end nearest to globe)

1 x Steel tensile wire (at opposite end)

Kit to suspend horizontally or vertically included.

Ceiling plate / Canopy

2 x mini canopies in matching finish to Orion.

H 1.55cm x Dia 4cm - H 5/8 in. x Dia 1 5/8 in.

Also available to order separately:

1 x Side Entry Adapter, which enables LED driver to be surface mounted (increases height of mini canopy to 3.1cm / 1 1/4 in.)

1 x Deep Canopy that can mount LED driver in canopy if required (H 6.5cm x Dia 13cm - H 2 1/2 in. x Dia 5 1/8 in.)

1 x Ceiling plate cover for junction box to mount mini canopy.

Weight

Product (net): 2.41 kg / 5.31 lbs

Boxed (gross): 3.32 kg / 7.32 lbs